


INSTALLATION

The water softener must be installed by qualified personnel, in compliance with Min. Decree 37/08, the best state of the art and in conformity with the instructions given in the technical manual.

Installation diagram

Legend

- 1) Carbon Block cartridge
- 2) Faucet
- 3) Aqua Control Unit
- 4) Power supply plug
- 5) Water supply valve

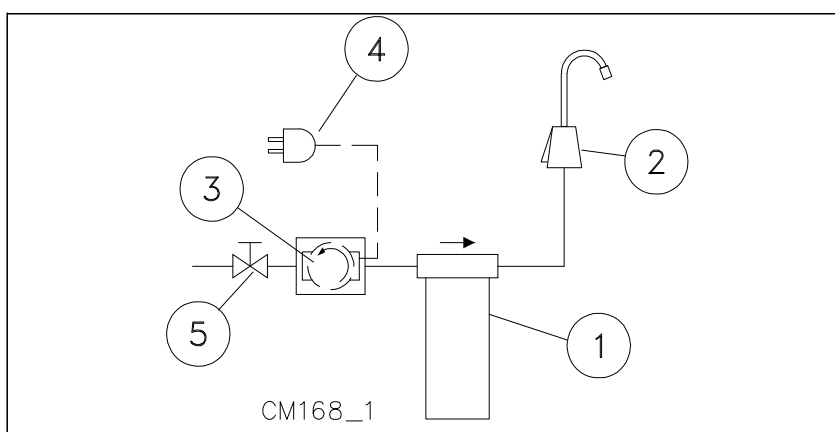

MAINTENANCE

To keep system in good working order it is necessary to change the filter and sanitize the system periodically.

As a rule this should be done once a year.

Another service may also be necessary depending on the operating conditions. For example, raw water with lots of sediment, chlorine, turbidity or hardness may require more frequent service, changing the filters every 6 months.

This procedure can be monitored by the Aqua-Control volumetric liter-counter, according to the alarm programming.

If the system is not used for a long time, it is necessary to call the Culligan Service Center which will carry out a general check and sanitization of the system before being restarted.

TABLE - REMOVAL OF UNWANTED SUBSTANCES

The **Carbon Block System** is NSF/ANSI 42 conforming.

SUBSTANCE	Max concentration in feed mg/L	Minimum removal required %	Minimum reduction %	Average reduction %
Cloro libero	2.0 mg/L + 10%	>50%	97.6%	97.3%